Risk Management in Large and Complex Civil Infrastructure Projects: DC Clean Rivers Project

Stephen D. Lisse, P.E.

DC Clean Rivers Project Commercial Manager, McKissack and McKissack, Inc.

stephen.lisse@dcwater.com

Abstract

Risk management is essential for any organization designing and constructing complex multi-million dollar civil infrastructure projects. The DC Clean Rivers Project risk management plan uses the risk register to identify, track, and manage risks. This traditional process starts at the early planning stage and continues through construction and system startup on a divisional contract basis. This paper describes the step by step approach used in the DC Clean Rivers Project to manage risk at different stages of the project (preliminary design, procurement and contract award, and construction/startup) on multiple contracts delivered by either the Design-Build or Design-Bid-Build approach. It also describes how and when to use quantita5(t)-6.6(i)2.1q12T791 o Introductio

This paper describes the approach to risk m
program, namely the DC Clean Rivers (DC
the risk management effort, the methodolo

The key aspects of the project risk manage

- Qualitative Risk Analysis and Risk R
-

- Quantitative Analysis of Cost and Schedule Impacts of Risk Events.

For this study, the definition of risk is taken from Page 166 of Total Cost Management Framework (2012), An uncertain event or condition that could affect a project objective or business goal.

Background

Communities with combined sewer systems are required to prepare Long Term Control Plans (LTCP) for the control of Combined Sewer Overflows (CSO) in accordance with Section 402(q) of the Clean Water Act. DC Water s LTCP requirements were completed in July 2002 and are currently being implemented through the DCCR Project. The DCCR Project is comprised of a system of tunnels for the Anacostia River, Rock Creek, Piney Branch and the Potomac River that will capture combined sewer flows for treatment at Blue Plains. About one-third of the district sewer system is a combined system and annual discharges into local waterway are estimated at 2 billion gallons. The Anacostia River receives 1.3 billion gallons, the Potomac River receives 640 million gallons and Rock Creek 50 million gallons of overflow each year. The schedule for completing the Project is included in a Federal Court Consent Decree between the United States, the District Government and DC Water.

Figure 1 Overview of DC Water CSO system

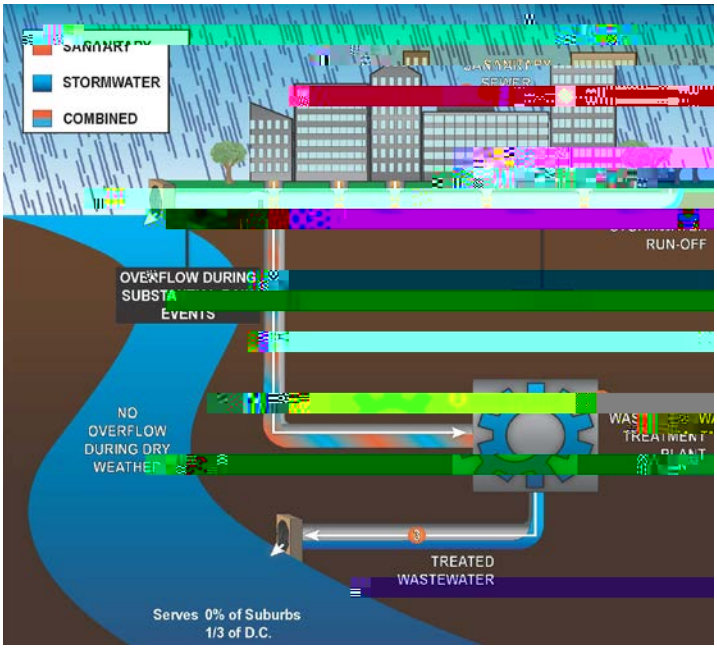

The Anacostia River Projects (ARP) include 12.8 miles (20.7 km) of deep tunnels with approximately 16 shafts, several pumping stations, and several river crossings. The Anacostia River Projects are broken into four main tunneling contracts. Geographically from south to north, these are the Blue Plains Tunnel (BPT), the Anacostia River Tunnel (ART), the Northeast Boundary Tunnel (NEBT), and the First Street Tunnel (FST).

Implementation of the ARP is divided into two phases. Phase 1 of the Program includes the BPT, ART, and several diversion structures and is required to be completed by March 2018. Phase 2 of the Program, consisting of the NEBT and FST, along with the Potomac River and Rock Creek projects, must be completed by March 2025.

Project Delivery Method

Design-Bid-Build (DBB) had been DC Water s preferred project delivery method prior to the start of the DCCR Project. DC Water established new procurement regulations in July 2009 due to the nature of tunneling work and the risks imposed on all parties associated with the DCCR Project. These regulations allow DCCR contracts to be procured by either using the traditional DBB or the Design-Build (DB) with early contractor involvement (ECI). In December 2013, a hybrid delivery method that combines the traditional DBB approach and DB with ECI was added to the mix. Having these different project delivery methods available allowed flexibility and developed a culture of risk management within the project team.

The fourteen contract divisions representing the Anacostia River Projects applicable to the DCCR risk management approach are listed in Table 1.

Table 1 DCCR Contract Divisions

CONTRACT DIVISIONS **Anacostia River Projects**	
Division	**Contract Description**

Figure 2 DC Water Procurement Process for DB Contract Divisions

Figure 3 DC Water Procurement Process for DB Contract Divisions

Earlier, Wone et al. (2015) had presented an overview of the DCCR procurement process and the risk management approach is further developed in the following sections of this study.

Risk Management Methodology

DC Water (2014) promulgated the DCCR Project Risk Management Plan which is the guideline for effectively decreasing the probability and impact of adverse risk events for the DCCR Project. Figure 4 shows the structure and format used in preparation of DCCR Project Risk Registeecf

Qualitative Risk Analysis

Qualitative risk analysis is performed and risk registers are developed for all contract Divisions

Figure 5 Risk Matrices Visual Representation

The typical process for developing Division specific risk registers is as follows.

- The draft Division risk register is structured as presented in Figure 4, with the defined risk categories and subcategories outlined above. The draft risk register is developed using available conceptual design documentation and project knowledge; and using information from previously developed risk registers for Divisions faced with similar risks.
- A qualitative risk analysis workshop will be facilitated with the initial design team using this draft risk register. A risk matrix guideline document will be produced for each workshop, as necessary to assist workshop attendees in the qualitative analysis process. The purpose of the workshop is to revise and build upon the draft risk register, to brainstorm additional risks, perform pre-mitigation qualitative analyses of risks, develop risk mitigation strategies, and assess mitigation task responsibilities and status. If necessary, the above tasks can be addressed in multiple workshops.

Risk Register Updating and Management

Division risk registers are formally updated throughout the initial design phase of the work. The formal updates will be timed to correspond with formal internal Division milestone submittals (i.e., at 60%, 90% submittals, etc.). Figure 6 provides an outline of the risk register process during this phase of the project. The goal of the updates is to reflect project progress relative to addressing risks, and will include the following.

- Updates to mitigation tasks and responsibilities,
- Mitigation status updates,
- Assignment of deliverable and completion date targets for mitigation measures,
- Documentation of mitigation measures taken,
- A separate independent cross-check of RFP/Contract Documents to verify that mitigation measures have been incorporated, and
- Assessment of current qualitative risk ratings.

Figure 6

DB Risk Register Process

Following contract award, the DB will be required to utilize and expand upon the risk management plan and risk register requirements submitted in his/her proposal to meet the technical requirements of the Contract Documents, which include, at a minimum.

- Submittal of a detailed risk management plan,
- Requirements to develop, maintain and update a project risk register, and
- Requirements to submit an updated risk register at regular intervals throughout design and construction.

An outline of the DB risk register process is shown in Figure 7.

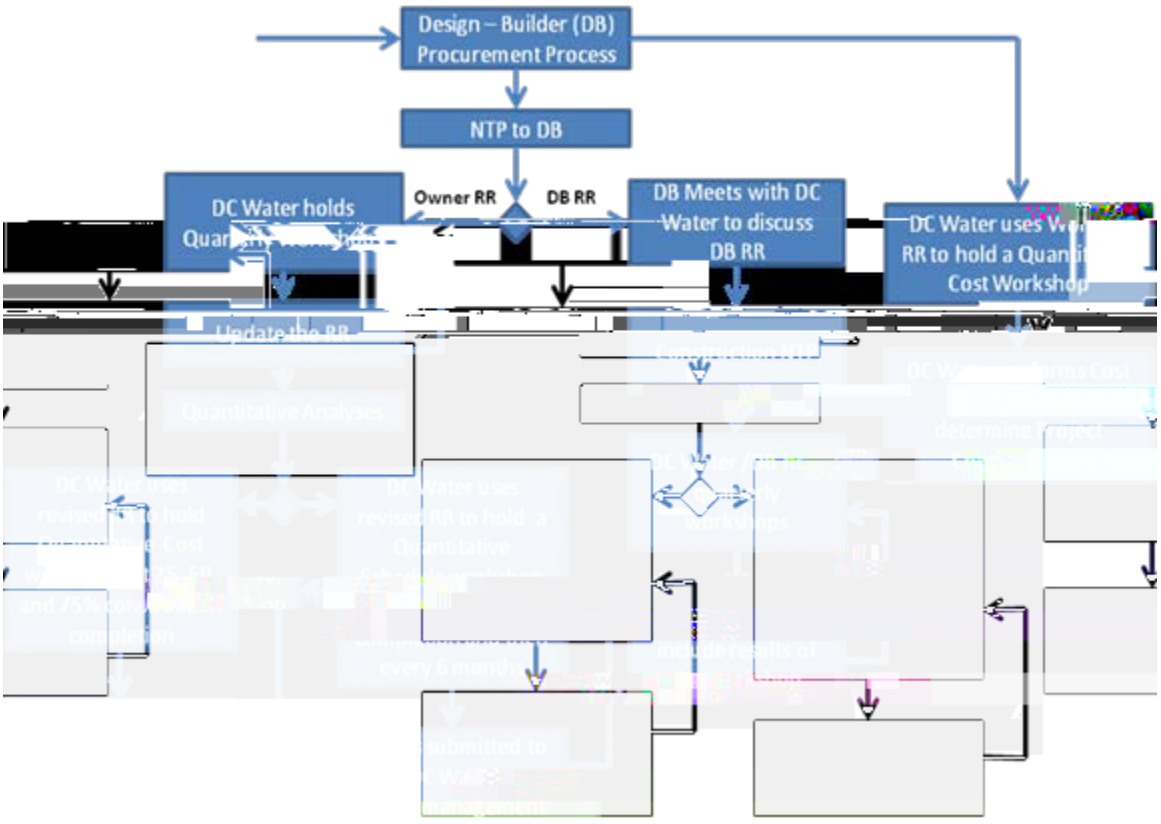

Figure 7 DB Risk Register Process Flowchart

As indicated above, Quantitative Cost Workshops are held at 25, 50 and 75% construction completion and a Quantitative Schedule Workshop will held at 40% construction completion and every 6 months thereafter. The benefit of conducting these analyses is that results can be used as a sanity check against the contingency dollars being utilized.

DBB Risk Regis ter Process

The risk management process through final design for DBB projects is summarized below and shown in Figure. 8, where CCM means DC Water s Consultant Construction Manager.

- The final designer participates in a risk management workshop to identify project risks and risk mitigation measures, and qualitatively assess the risk rating of the identified risks based on the risk s likelihood of occurrence and severity. The risk ratings serve as a guide for the final designer in assigning a priority for preparing mitigation plans.
- At the completion of the workshop, a risk register with all identified risks, mitigation measures, and entities responsible for carrying out planned mitigation measures is prepared by the final designer.
- The final designer will review and track progress of all risk mitigation plans measures and update the risk register as needed.
- The updated risk register is submitted along with the Interim, Prefinal and Final Submittals.

- A sensitivity analysis (regression) is performed, as necessary, to identify the main sources of cost to the project. These sensitivity analyses are useful tools for revealing the key constituent sources of risk and helping DC Water to focus efforts on those areas which would have the most beneficial effect.

Figure 9 Quantitative Analysis of Schedule Risk Events

Using the above described methodology, DC Water has developed a risk management process to readily monitor the Division contingency status through construction as an outcome is shown in Figure 10. This figure tracks the actual project contingency utilized during the construction period and readily visualizes the remaining contingency. A recommended minimum reserve amount of project contingency based upon Quantitative Cost Analysis at that construction phase is also shown. If trending indicates the remaining contingency will be less than the minimum reserve amount, then augmentation of the project contingency may be initiated via the DCCR change order process.

Figure 10 DCCR Contract Division Contingency Monitoring

Conclusion

The methodology described in this study results in an effective risk management plan for large civil infrastructure projects that is:

- Built upon ongoing qualitative risk analysis,
- Requires continuous risk workshops involving project stakeholders,
- Uses probabilistic modeling simulation to provide numerical ranges of the potential current cost and schedule impacts, and
- Establishes appropriate project contingencies and subsequently as a comparison to the 6.7(i)2.7(al)2d

- Tracks contingency spending given occurring risk events, and
- Updates program schedule analysis (identifies impacts to other Divisions).

Acknowledgement

Many of the figures presented in this report were provided by Dr. George Teetes of Lachel and Associates and Dr. Moussa Wone of DC Water whose support is very much appreciated.

References

AACE International, Total Cost Management Framework, First Edition, Revised, Chapter 7.6, Risk Management, Morgantown, WV, p. 166, 2012.

Wone, M., Ray, C., Corkum, D., Teetes, G. and Lisse, S., Risk Management in Capital Improvement Projects The DC Clean Rivers Project Approach, *Proceedings of Society for Mining, Metallurgy and Exploration 2015 Rapid Excavation and Tunneling Conference,* New Orleans, LA, June 2015.

DC Water, DC Clean Rivers Project Risk Management Plan, Washington, DC, 2014.

Author

Stephen D. Lisse, P.E. is the DCCR Commercial Manager at McKissack and McKissack, Inc. and a PhD Student in the Industrial & Systems Engineering Department at Virginia Polytechnic Institute and State University. The author enlisted in the US Navy in 1968 and was selected for the Navy Enlisted Scientific Education Program where he was awarded a BSME with Highest Distinction at Purdue University. He was designated a Surface Warfare Officer onboard USS MIDWAY CVA-41 and selected for lateral transfer to the Civil Engineer Corps. He had various public works and contracting assignments, and also a tour as the Mobile Utilities Support Equipment Director. He returned to Purdue University under the Naval Postgraduate Education Program where he was designated a Purdue Fellow and received his MSME. Prior to retirement in 1988, he was a Special Assistant to the Navy Undersecretary for Safety and Survivability and implemented the Non Developmental Item process. He subsequently has over twenty years program/project management experience on large and complex integrated projects valued up to $6 billion. The author can be contacted at: stephen.lisse@dcwater.com.

####